
COMICA
Pro Wireless Audio Solution

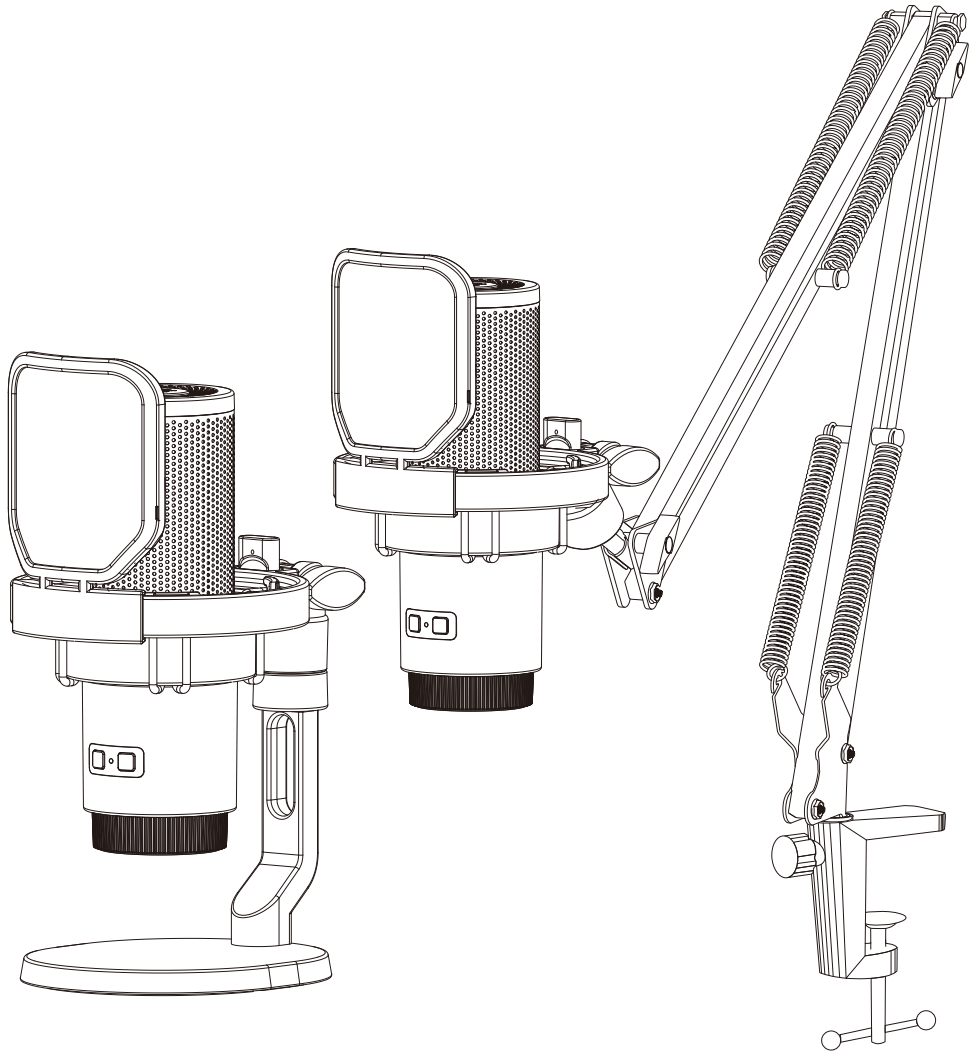

EJoy Uni Pro

RGB Cardioid Condenser Wireless USB Microphone

RGB心型电容无线USB麦克风

2.4GHzワイヤレス USBコンデンサーマイク

User Manual/使用说明书/取扱説明書

01 English

02 中文

03 日本語

Foreword

Thanks for purchasing Comica EJoy Uni Pro

Main Features

- Groundbreaking Studio Mic with Integrated Wireless Module
- Support Wired/Wireless Dual Modes for Flexible Usage
- 48kHz/24bit Recording, Professional Studio Quality
- Built-in Sound Card, Plug and Play
- Support One-key CalMix® AI Denoise
- Support Gain Control, Monitoring & Muting
- Dynamic Radiant RGB Light with 4 Unique RGB Effects
- USB-C Digital Output, Universal for Smartphone/Computer
- Unique Shock-mount and Metal Pop Filter
- Adjustable Boom Arm, Loading Up to 1.5kg —Uni Pro(A)
- Equipped with Desktop Mic Stand, Flexible Extension—Uni Pro(D)

Notice

⚠ Please aim the front of the microphone at the sound source to get an excellent recording

⚠ Do not use this equipment in the vicinity of a heat source or interference source, such as radiator, oven, refrigerator or air conditioner


⚠ This product is a high-precision instrument, please avoid falling, collision or pounding

⚠ Do not use the equipment in rain or in a damp environment to avoid short-circuit danger


⚠ Please store the product in a dry environment

⚠ When connect the mic with computer, please click sound setting and choose "Comica_EJoy Uni Pro TX" as the output and input device; when connect the receiver with computer, please click sound setting and choose "Comica_EJoy Uni Pro RX" as the output and input device

When connect the microphone with computer:

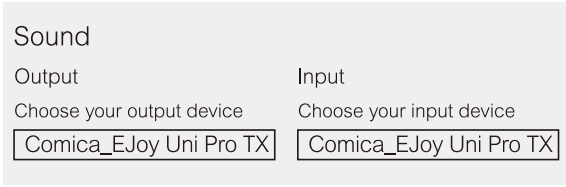


When connect the receiver with computer:

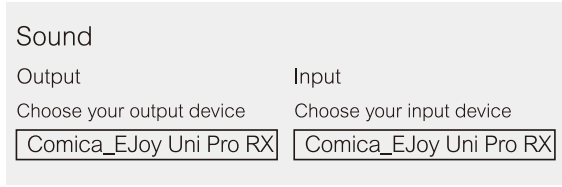


⚠ If the input sound is too loud when connected to the computer, users can adjust the computer's "Microphone Properties-Level" to reduce the gain(Take the Windows system as an example)

When connect the microphone with computer:

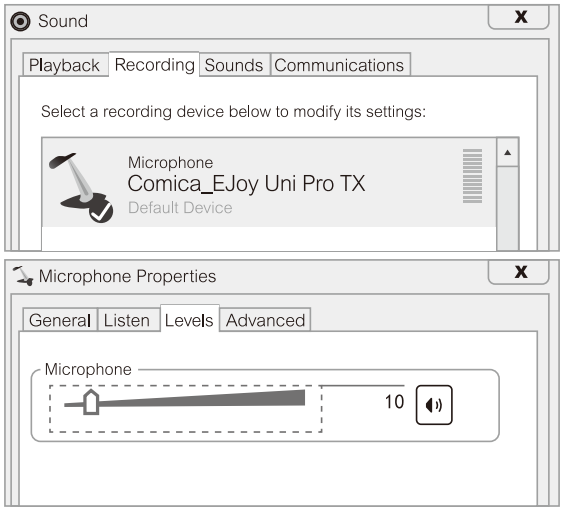

When connect the receiver with computer:

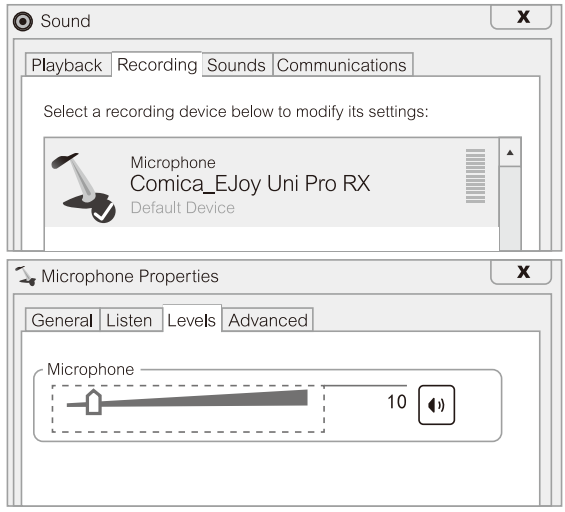


⚠ EJoy Uni Pro has been granted type certification in accordance with the provisions of Article 38-24(1) of the Japan Radio Law


R 220-JP8047

Packing List


EJoy Uni Pro(A):




Microphone(TX) *1



Receiver(RX) *1




Pop Filter *1



USB C-USB C Charging/ Output Cable *1



USB C-USB A Adapter *1



Boom Arm *1



Hook and Loop Fastener *5




User Manual *1




Warranty Card *1


EJoy Uni Pro(D):




Microphone(TX) *1



Receiver(RX) *1




Pop Filter *1



USB C-USB C Charging/ Output Cable *1



USB C-USB A Adapter *1



Desktop Mic Stand *1




User Manual *1



Warranty Card *1

Components and Instruction

Microphone（TX）：

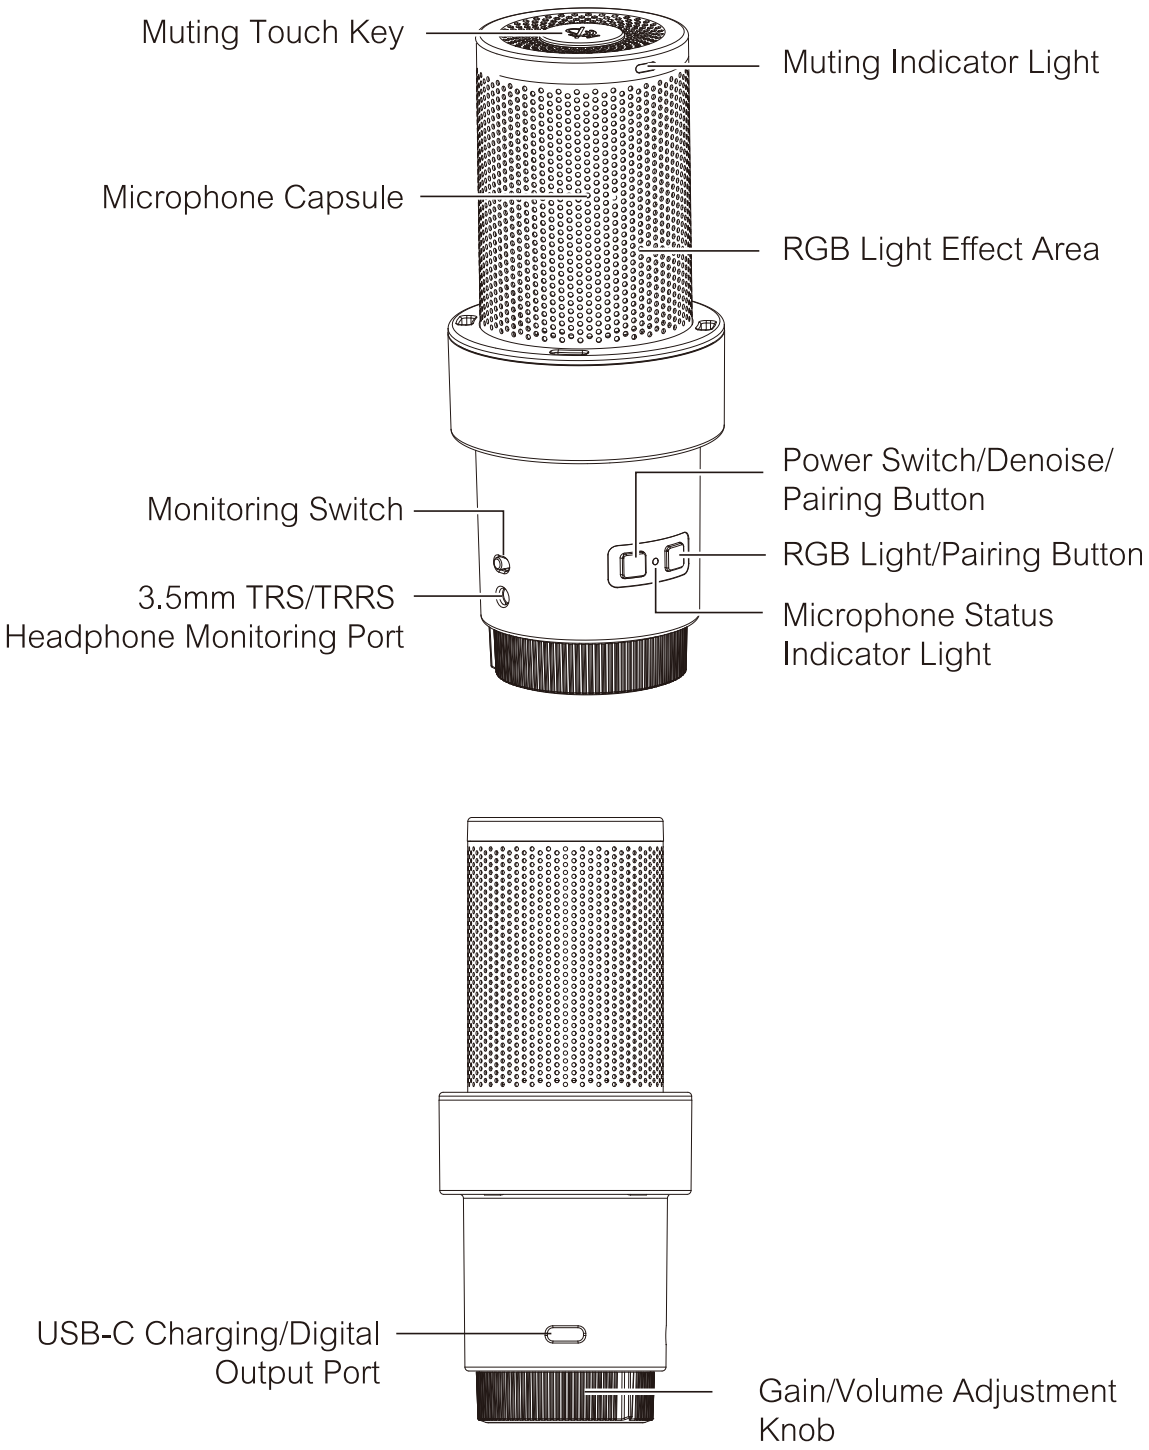

1. Muting Touch Key

Touch to adjust the microphone normal pick up or muting status

2. Microphone Capsule

3. Monitoring Switch

Move back to turn on the mic monitoring sound; move forward to turn off the mic monitoring sound

4. 3.5mm TRS/TRRS Headphone Monitoring Port

Plug in 3.5mm TRS/TRRS headphones for real-time monitoring

5. Muting Indicator Light

Red light keeps on when muting is on, no light will on when muting is off

6. RGB Light Effect Area

7. Power Switch/Denoise/Pairing Button

Long press to turn the power on/off; short press to turn denoise on/off

8. RGB Light/Pairing Button

Long press to turn light power on/off; short press to switch breathing light/dynamic gradient/audio dynamics/comica orange four kinds of light effects

Long press the two pairing buttons above to enter pairing status. At this time, the microphone status indicator light blinks blue light fast

9. Microphone Status Indicator Light

Unpair	Blue light blinks slowly
Pairing	Blue light blinks fast
Paired	Blue light keeps on
Denoise	Green light keeps on
Low power	Red light blinks slowly
Charging when powered off	Red light keeps on
Fully charged when powered off	Blue light keeps on


10. USB-C Charging/Digital Output Port

Charging the mic with a power bank/DC power supply via the charging/output cable, or connect to devices for audio output

11. Gain/Volume Adjustment Knob


Taking the orange scale in the center as a standard, rotate left to decrease the mic gain and headphone monitoring volume; rotate right to increase the mic gain and headphone monitoring volume

Receiver（RX）：

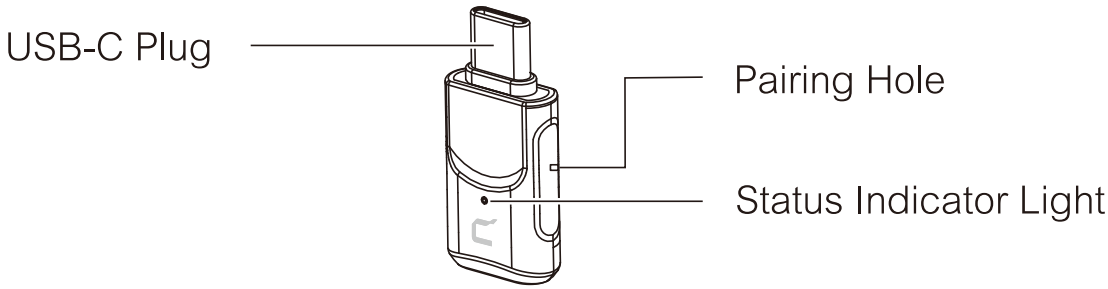

1. USB-C Plug
2. Pairing Hole
3. Status Indicator Light


Unpair	Blue light blinks slowly
Pairing	Blue light blinks fast
Paired	Blue light keeps on

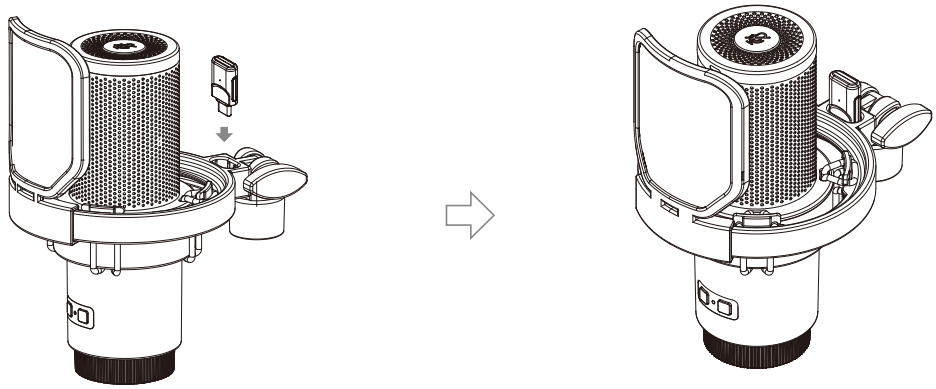


The receiver is placed in the shock-mount groove of microphone

Install the boom arm:


1. Clamp the stand base of boom arm to the desktop or other objects, then tighten the fixing clip clockwise

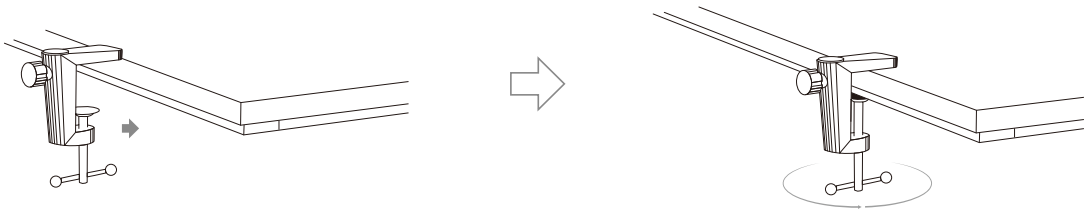


2. Connect the boom arm to the stand base, adjust the angle of boom arm through the fixing clip on stand base

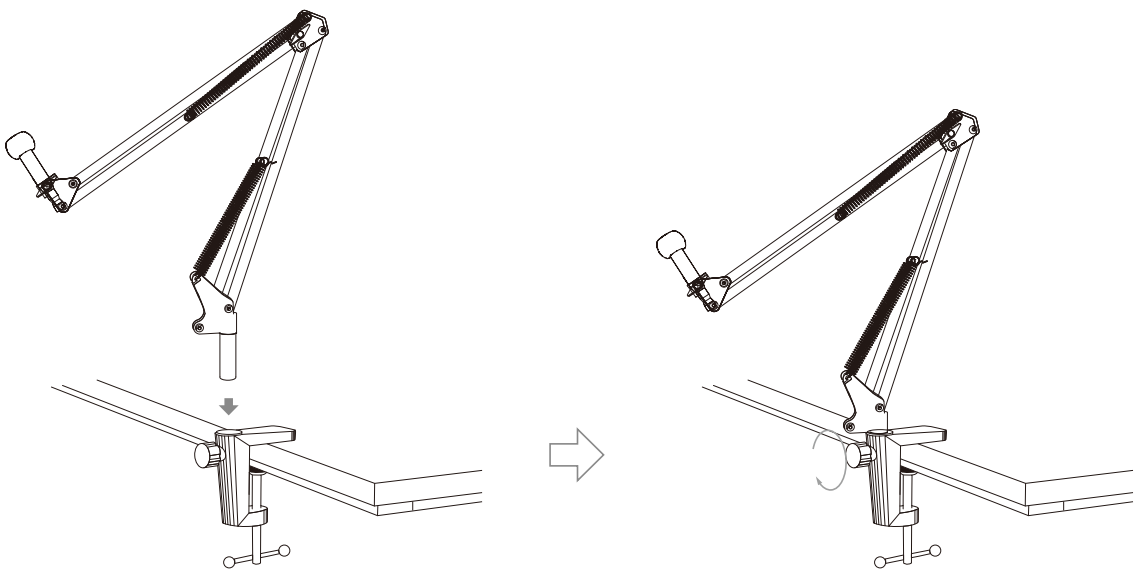

3. Connect the mic shock-mount to the boom arm, then tighten the fixing clockwise

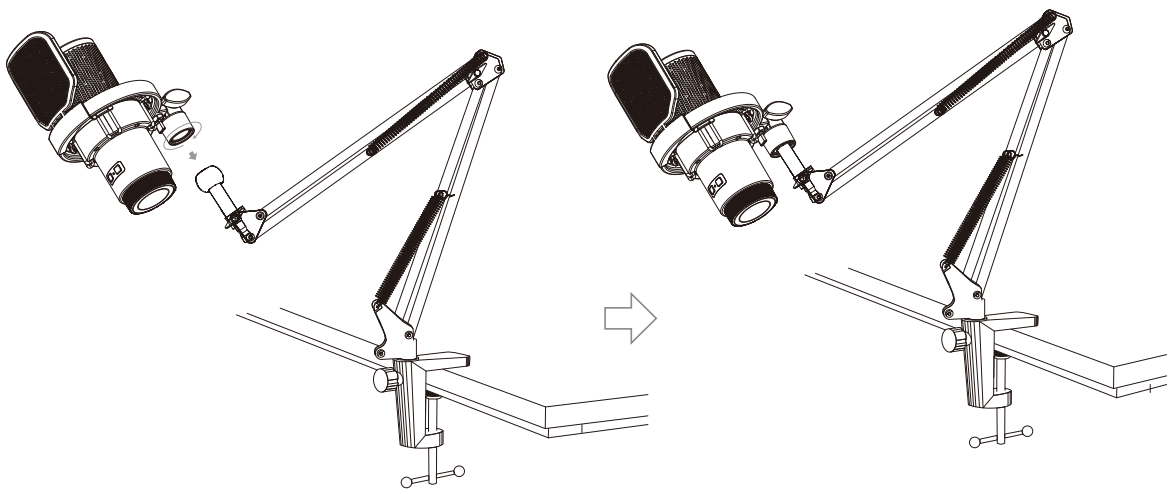


4. Adjust and fix the mic through the locking screw on boom arm

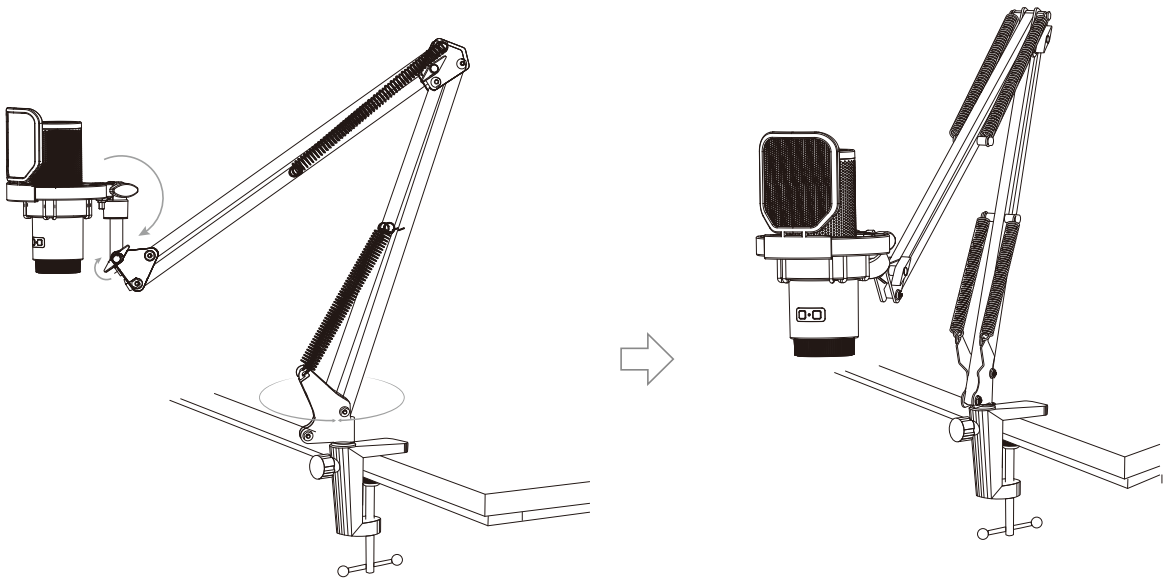


Install the desktop mic stand:


1. Connect the threaded hole of the shock-mount to the thread of the desktop mic stand, turn clockwise to tighten and fix

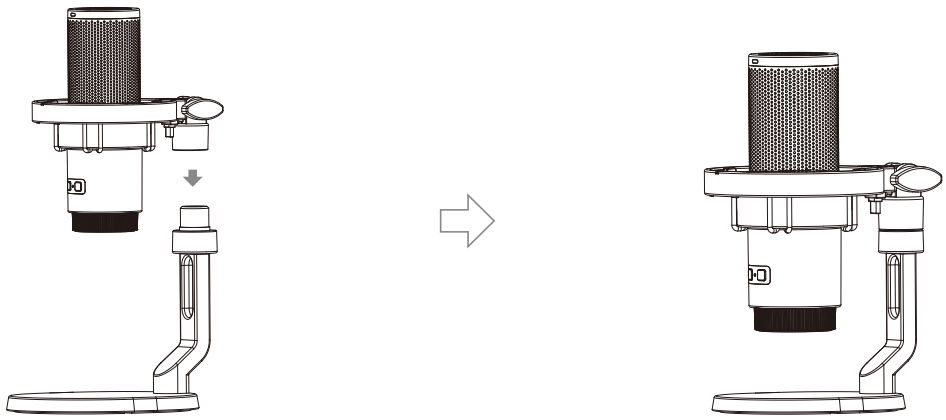

2. Install the pop filter on the shock-mount

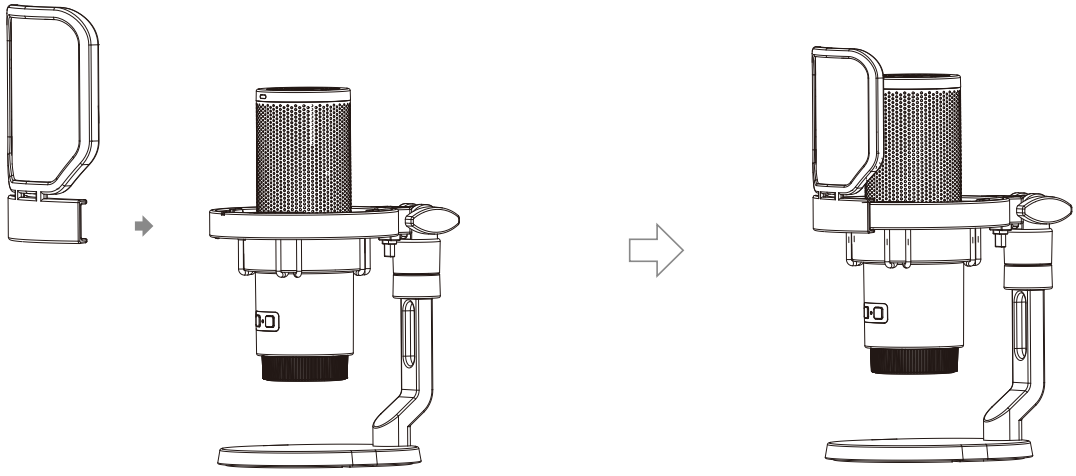


3. Adjust and fix the shock-mount and mic through the locking screw

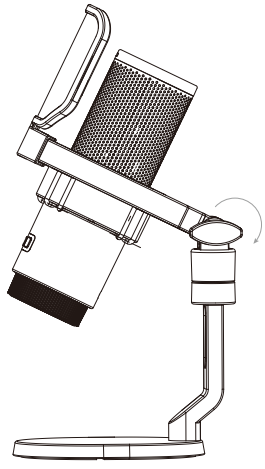

Wired mode

Connected the mic with smartphone/computer through USB C-USB C charging/output cable and related audio adapter cable/adapter; Choose whether to monitor according to your needs

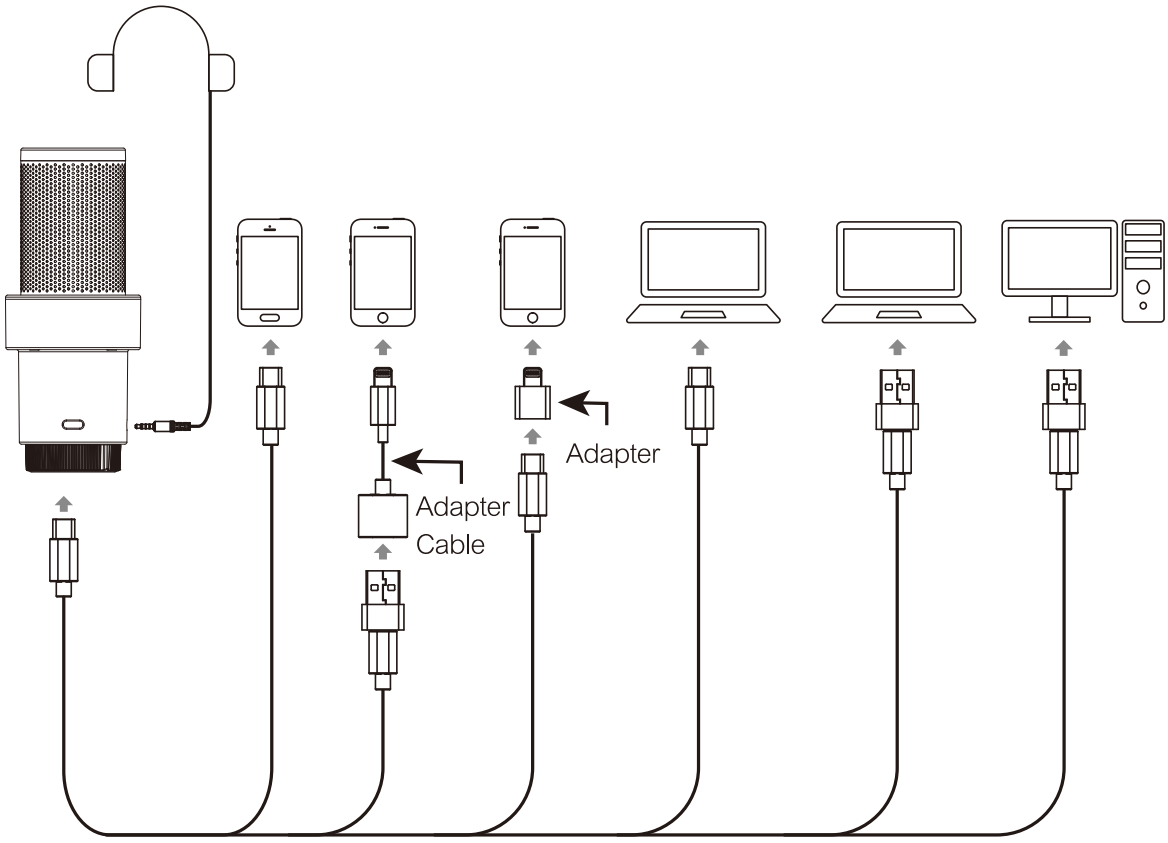


1. Please purchase USB-Lightning adapter cables/adapters support OTG function by yourself when connected with lightning port devices
2. The microphone will automatically switch on when connected with a device,and it will automatically turn off after 10 minutes if disconnected from a device

Wireless mode

Pairing (the mic and receiver are paired by default at the factory)

The receiver will automatically connect to the mic once it has been inserted into the device, and the indicator light on the receiver will keeps on blue. If the blue light blinks slowly, it indicates a failed connection

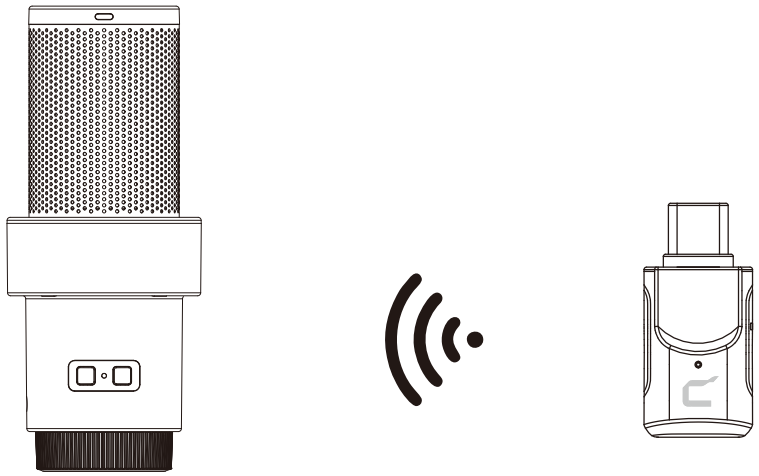


If pairing fails, please follow the steps below to re-pair:

1. Long press the two pairing buttons of mic to enter pairing status. At this time, the microphone status indicator light blinks blue light fast
2. Insert a pin into the paring hole of receiver and press to enter pairing status. At this time, the status indicator light on receiver blinks blue light fast
3. After successful pairing, the status indicator light on both will keeps on

Usage

When connected with a device, please refer to the following connection methods:

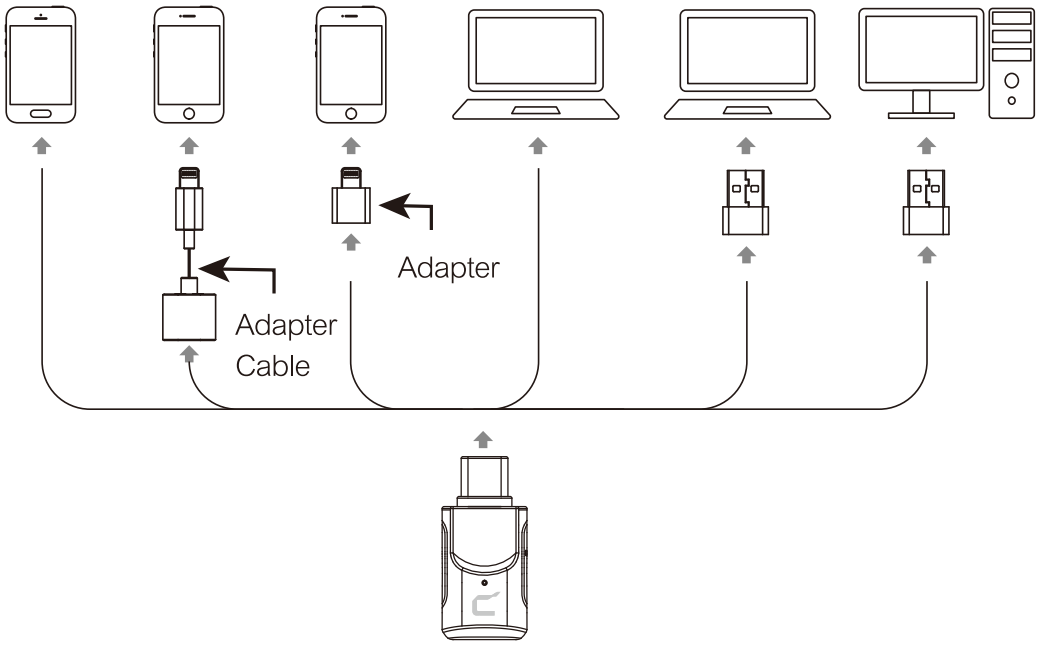

1. Please purchase corresponding adapter cables/adapters support OTG function by yourself when connected with devices
2. The wired and wireless mode can be used in sync

Specifications

Transmitting Power	+10dBm
Reception Sensitivity	-97dBm
Antenna Type	Ceramic Antenna
Wireless Delay	<20ms
Directivity	Cardioid
Microphone Sensitivity	-35dB±2dB
Frequency Range	20Hz ~ 20kHz
Maximum SPL	105dB (@ 1% THD)
Signal / Noise	72dB SPL(A-weighted,as per IEC651)
Equivalent Noise	22dB SPL(A-weighted,as per IEC651)
Dynamic Range	83dB SPL(A-weighted,as per IEC651)
Sampling Rate	48kHz
Bit Depth	Microphone Recording：24-bit Headphone Monitoring：16-bit
Output Interface	USB-C
Monitoring Port	3.5mm TRS/TRRS
Battery Type	Lithium Polymer 1000mAh 3.7V
Charging Time	1.5 hours
Standby Time	RGB off: 36 hours RGB on: 18 hours
Net Weight	Microphone Body：140g RX：2.2g
Dimension	Microphone Body：Φ64.5 x L154.2mm RX：15.8 x 7.0 x 32.2mm
Operating Temperature	0℃~+50℃
Storage Temperature	-20℃~+60℃

Instagram: Comica Audio
Facebook: Comica Audio
TikTok: Comica Audio
Twitter: Comica Audio JP
YouTube: Comica Audio
Website:comica-audio.com

COMICA is a registered trademark owned by Commlite Tech Co.,Ltd
Email: support@comica-audio.com

前言

感谢您购买科唛享听Uni Pro

产品主要功能

- 首创棚麦集成无线射频模块，有线无线双模式
- 48kHz/24bit录音，专业棚级音质
- 内置声卡，即插即用
- 支持一键CalMix® AI智能降噪
- 支持增益调节，实时监听及静音
- RGB动态灯效，4种灯效模式选择
- USB-C数字输出，通用于手机、电脑
- 独特减震架及金属防喷罩，有效滤除噪音
- 可调节悬臂支架，承重高达1.5kg —Uni Pro(A)
- 搭配圆盘支架，可灵活延展及组合—Uni Pro(D)

注意事项

⚠ 为获得更好的录音效果，请将麦克风的正面对准音源

⚠ 请勿将本设备放置在热源或干扰源附近使用，如散热器、烤箱、冰箱、空调等

⚠ 本产品属于高精密仪器类产品，请避免使用时掉落、碰撞或重击

⚠ 不要在雨中或潮湿的环境中使用该设备，否则会有短路的危险

⚠ 请在干燥环境中对该产品进行保存

⚠ 当麦克风连接电脑使用时，请打开声音设置界面选择“Comica_EJoy Uni Pro TX ”为输出和输入设备；当接收器连接电脑使用时，请打开声音设置界面选择“Comica_EJoy Uni Pro RX ”为输出和输入设备

麦克风连接电脑使用时：




接收器连接电脑使用时：




⚠ 若连接电脑输入时声音偏大，可以调节电脑“麦克风属性-级别”降低增益(下面以Windows系统为例)

麦克风连接电脑使用时：

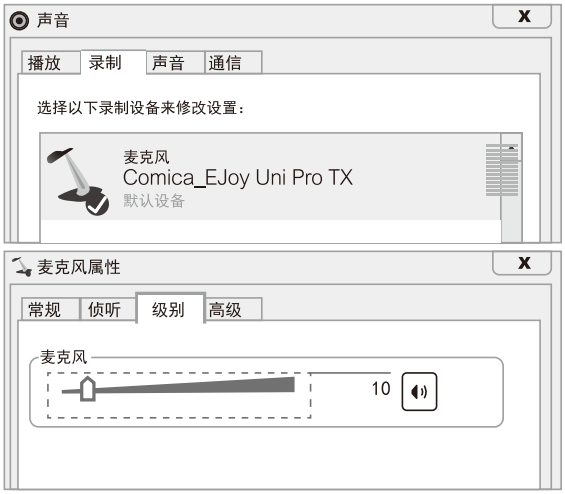

接收器连接电脑使用时：

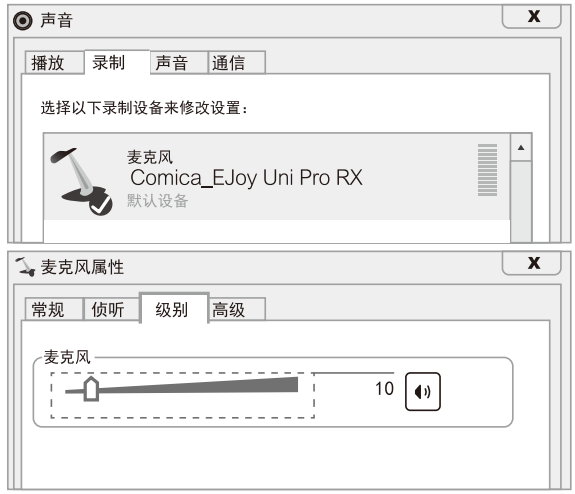


⚠ EJoy Uni Pro根据日本无线电法第38-24(1)条的规定获得型式认证


R220-JP8047

包装清单


享听Uni Pro(A)：




麦克风(TX) *1



接收器(RX) *1




防喷罩 *1



USB C-USB C 充电/输出连接线 *1



USB C-USB A 转接头 *1



悬臂支架 *1



魔术贴 *5




说明书 *1




保修卡 *1


享听Uni Pro(D)：




麦克风(TX) *1



接收器(RX) *1



防喷罩 *1



USB C-USB C 充电/输出连接线 *1



USB C-USB A 转接头 *1



圆盘支架 *1




说明书 *1



保修卡 *1

部件介绍及说明

麦克风（TX）：

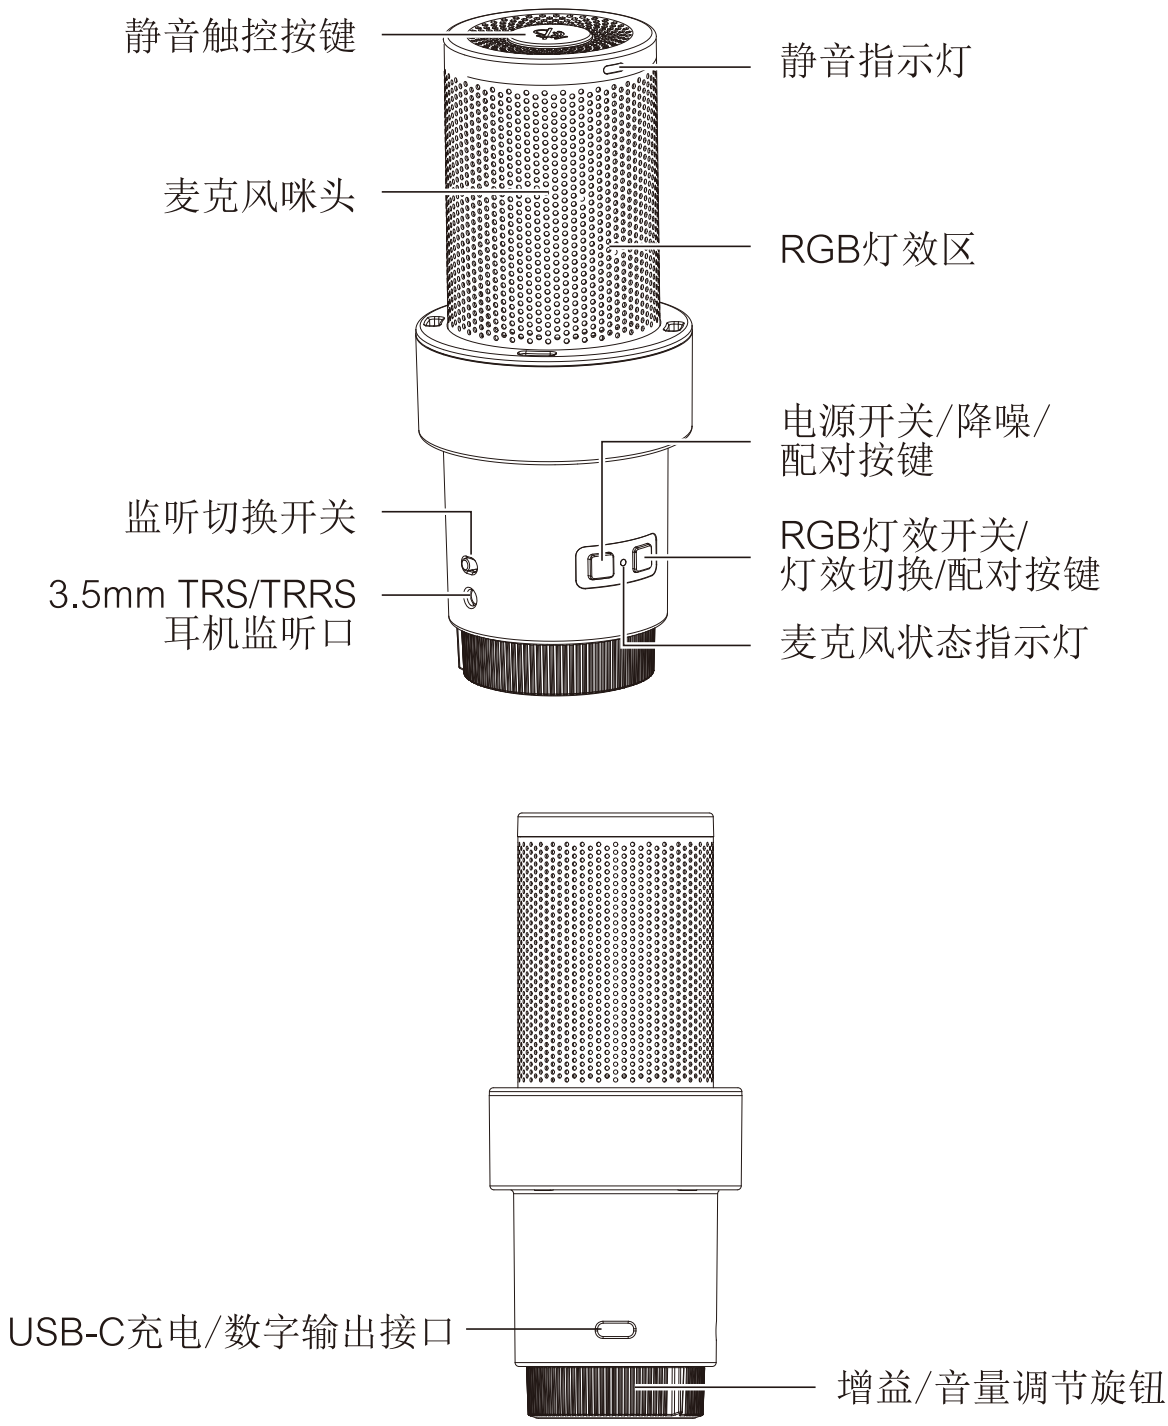

1. 静音触控按键

轻触切换麦克风正常拾音或静音状态

2. 麦克风咪头

3. 监听切换开关

后拨开启麦克风监听声音；前拨关闭麦克风监听声音

4. 3.5mm TRS/TRRS耳机监听口

可插入3.5mmTRS/TRRS耳机进行实时监听

5. 静音指示灯

静音开启后红灯长亮，静音关闭后指示灯熄灭

6. RGB灯效区

7. 电源开关/降噪/配对按键

长按开机或关机；短按开启或关闭降噪功能

8. RGB灯效开关/灯效切换/配对按键

长按开启或关闭灯光效果；短按切换呼吸灯/动态渐变/音频动态/科唛橙四种灯光效果

同时长按以上两个配对按键进入配对状态，此时麦克风状态指示灯蓝灯快闪

9. 麦克风状态指示灯

未配对	蓝灯慢闪
配对中	蓝灯快闪
配对成功	蓝灯长亮
降噪开启	绿灯长亮
电量不足	红灯慢闪
关机时充电	红灯长亮
关机时充满	蓝灯长亮


10. USB-C充电/数字输出接口

通过充电/输出连接线连接充电宝/DC电源进行充电，或连接设备输出音频

11. 增益/音量调节旋钮


以中间橙色刻度线为标准，往左旋转减小麦克风增益及耳机监听音量；往右旋转增大麦克风增益及耳机监听音量

接收器（RX）：

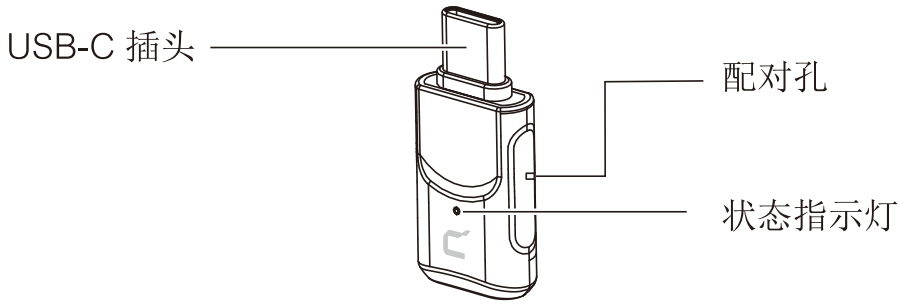

1. USB-C插头
2. 配对孔
3. 状态指示灯

未配对	蓝灯慢闪
配对中	蓝灯快闪
已配对	蓝灯长亮

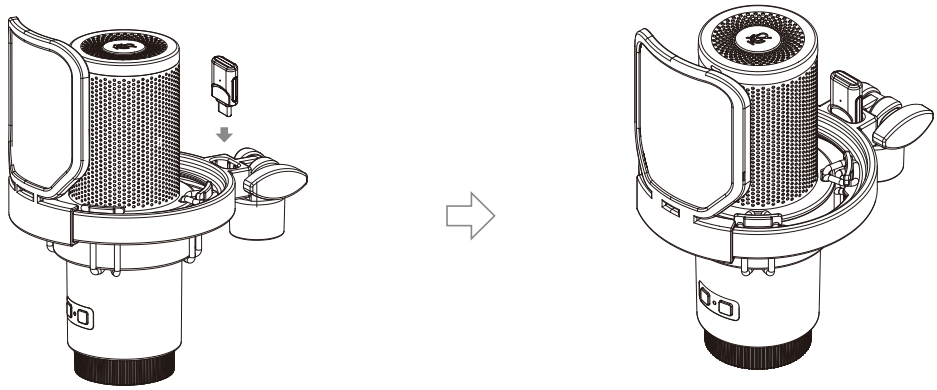


接收器放置于麦克风减震架凹槽内


安装与使用

安装悬臂支架：


1. 将悬臂支架底座的固定夹夹在桌面或其他物体上，顺时针拧紧固定

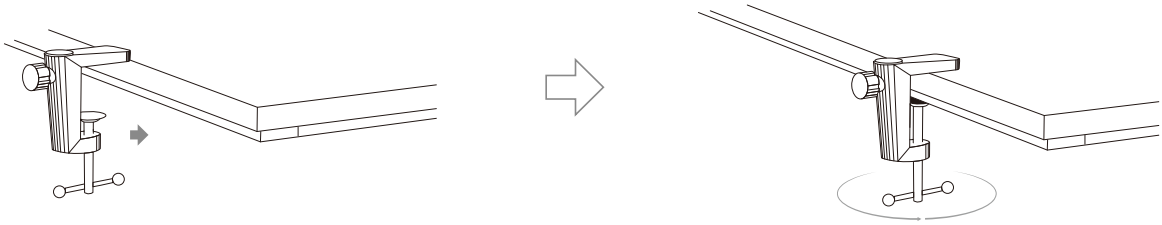


2. 将固定夹与悬臂支架相连，通过底座上的固定螺丝钮来调整支架的角度

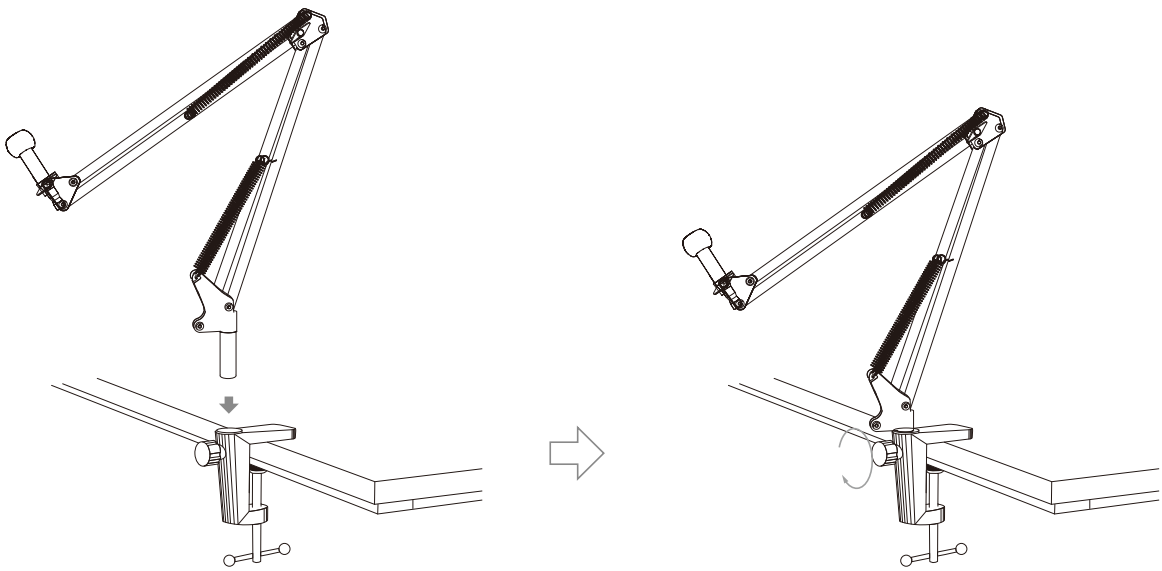

3. 将麦克风减震架与悬臂支架相连，顺时针旋转拧紧固定

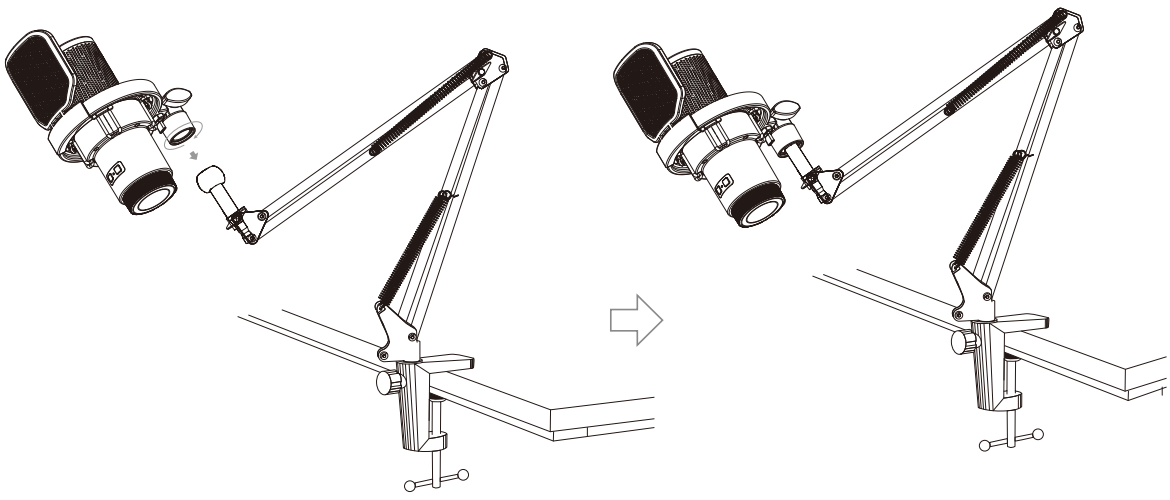


4. 通过悬臂支架上的锁紧螺杆来调整和固定麦克风的位置

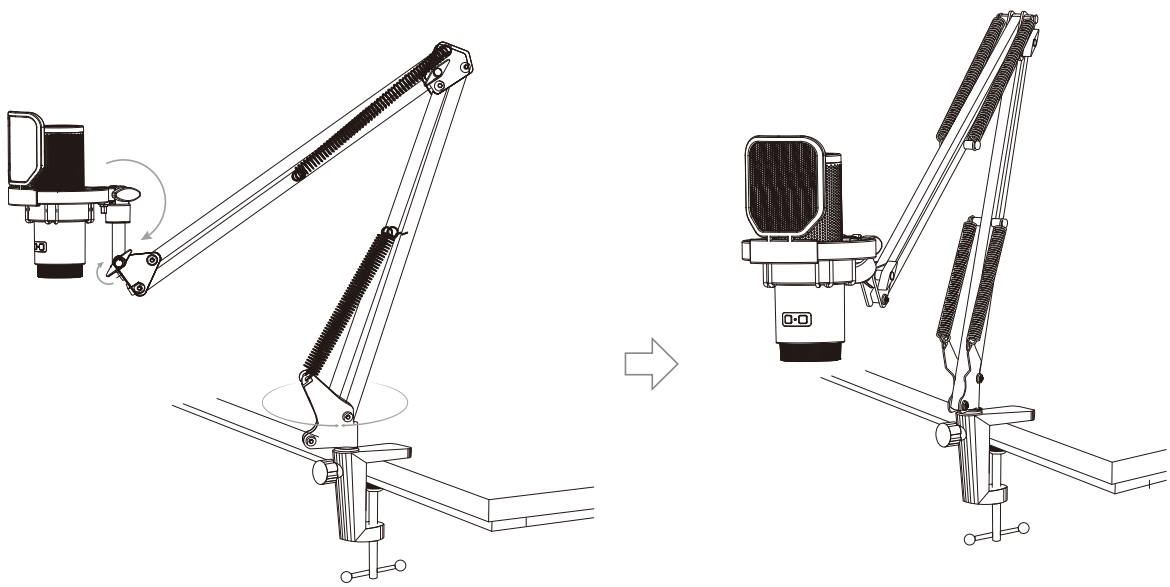


安装圆盘支架：


1. 将减震架的螺纹孔与圆盘支架的螺纹相连，顺时针旋转拧紧固定

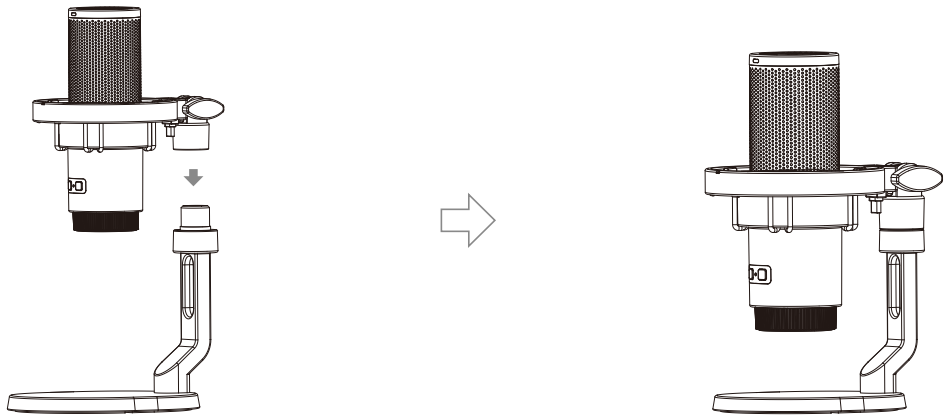

2. 将防喷罩安装在减震架上

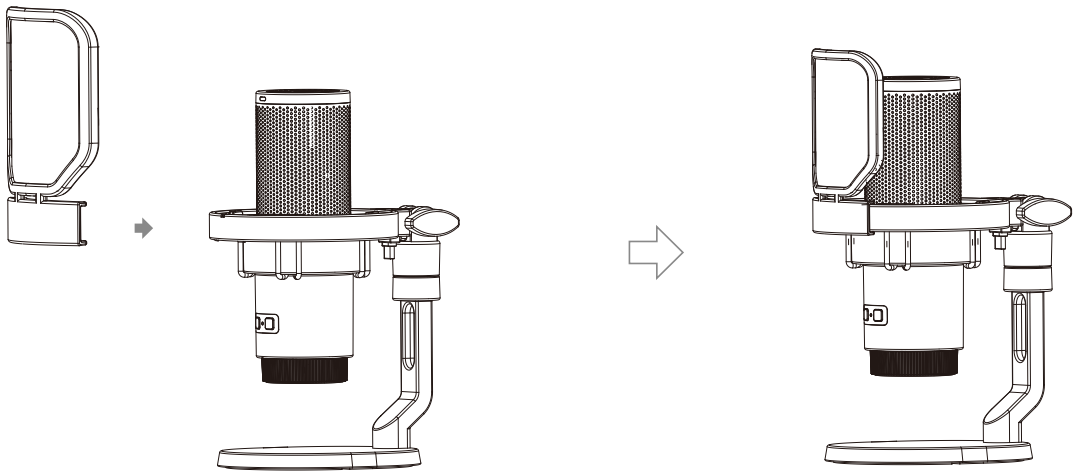


3. 通过减震架上的锁紧螺杆来调整并固定减震架与麦克风的位置

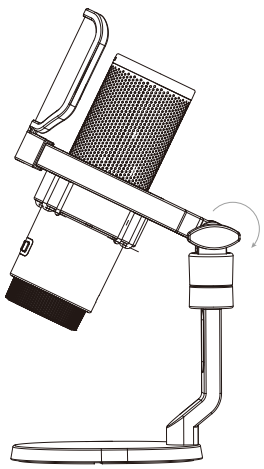

有线模式

通过USB C-USB C充电/输出连接线和相关音频转接线/转接头连接麦克风和手机/电脑，根据个人需求选择是否监听

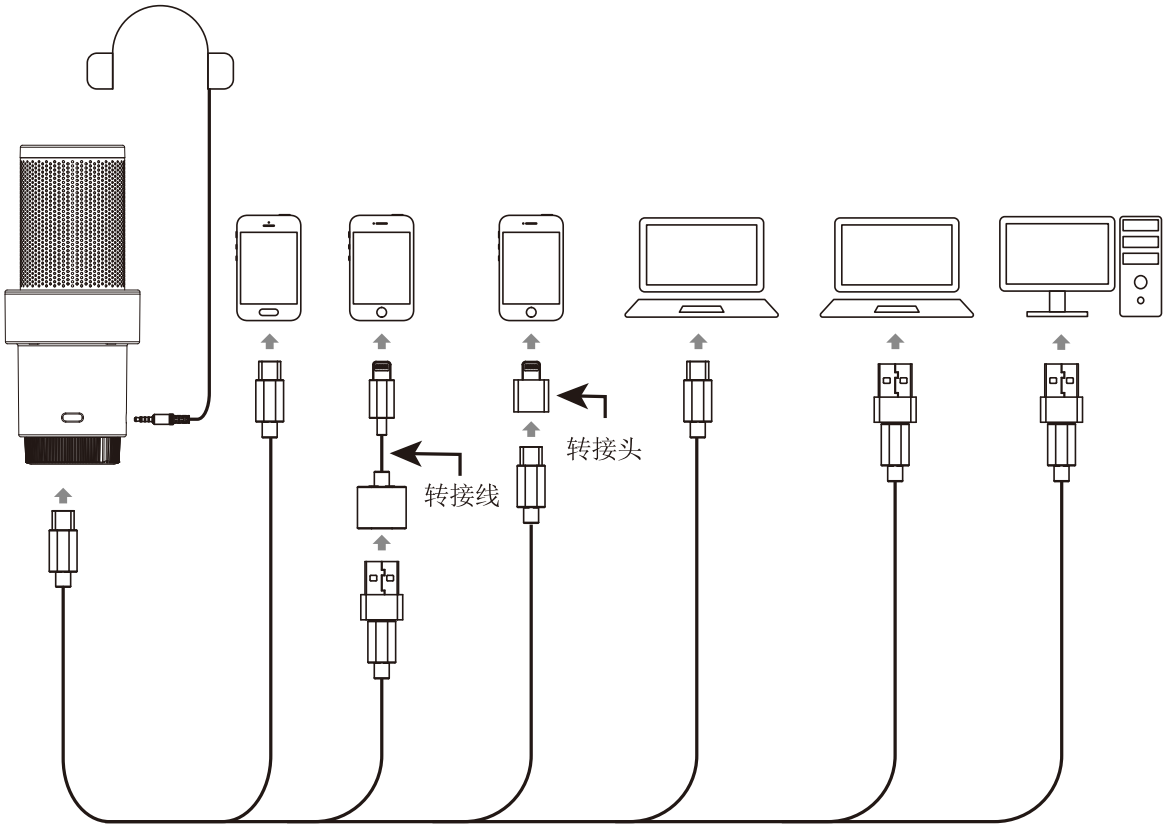


1. 搭配Lightning接口设备时，请自行购买支持OTG功能的USB-Lightning转接线/转接头
2. 麦克风连接设备后会自动开机；断开设备10分钟未使用会自动关机

无线模式

配对（出厂时麦克风与接收器默认配对）

将接收器插入设备后，接收器与麦克风即自动连接，此时接收器指示灯蓝灯长亮。如指示灯蓝灯慢闪，则未连接

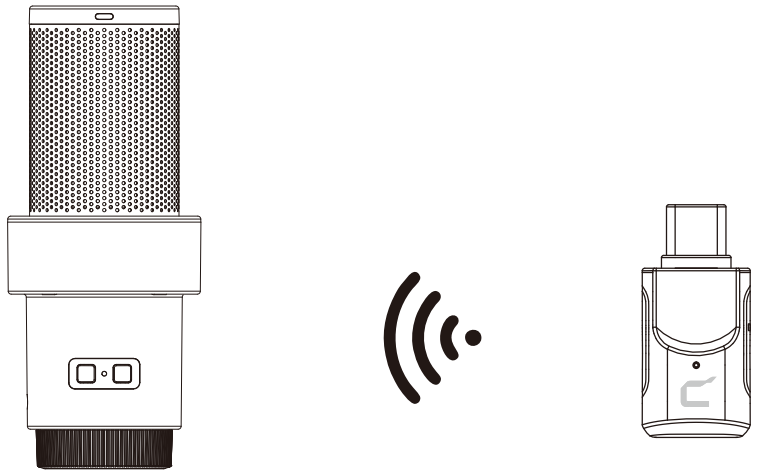


如果二者断开连接，请按以下步骤重新配对：

1. 将麦克风开机后，同时长按两个配对按键进入配对状态，此时状态指示灯蓝灯快闪
2. 将接收器连接至设备，把卡针插入接收器的配对孔挤压进入配对状态，此时状态指示灯蓝灯快闪
3. 配对成功后，麦克风和接收器的状态指示灯均蓝灯长亮

使用

当接收器连接设备时，请参考以下连接方式：

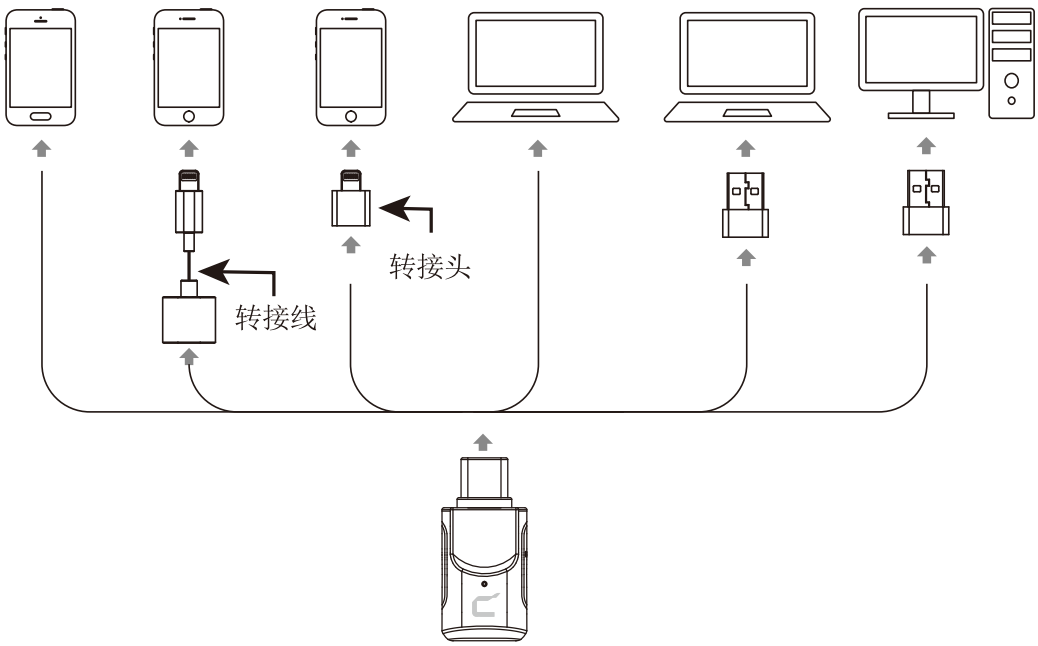

1. 搭配相应的接口设备时，请自行购买支持OTG功能的转接线/转接头
2. 有线模式和无线模式可同时使用

规格参数

发射功率	+10dBm
接收灵敏度	-97dBm
天线类型	陶瓷天线
无线延迟	<20ms
指向性	心型指向
咪头灵敏度	-35dB±2dB
频率范围	20Hz ~ 20kHz
最大声压级	105dB (@ 1% THD)
信噪比	72dB SPL(A-weighted,as per IEC651)
等效噪声	22dB SPL(A-weighted,as per IEC651)
动态范围	83dB SPL(A-weighted,as per IEC651)
采样率	48kHz
位深	麦克风录音：24-bit　　耳机监听：16-bit
输出接口	USB-C
监听接口	3.5mm TRS/TRRS
电池类型	锂聚合物 1000mAh 3.7V
充电时间	1.5小时
续航时间	关闭RGB：36小时　　开启RGB：18小时
产品重量	麦克风主体：140g　　接收器：2.2g
产品尺寸	麦克风主体：Φ64.5 x L154.2mm 接收器：15.8 x 7.0 x 32.2mm
工作温度	0℃~+50℃
储存温度	-20℃~+60℃

扫二维码关注
科唛官方公众号

COMICA科唛

COMICA科唛

COMICA科唛

COMICA科唛

邮箱：support@comica-audio.com
电话：400-8303-981
网址：comica-audio.com
版权及科唛商标归咔莱科技有限公司所有

序文

Comica「EJoy Uni Pro」マイクをご購入いただき、誠にありがとうございます

主な特徴

- 革新的スタジオマイクにRF無線モジュールを内蔵し、有線・無線の2つのモードに対応
- プロ品質の音質、48kHz/24bitの録音
- サウンドカード内蔵で、プラグ＆プレイ
- ワンタッチでCalMix® AIノイズリダクションに対応
- ゲイン調整・リアルタイムモニタリング・ミュート機能をサポート
- RGBダイナミックライト搭載、4種類のライトエフェクトを切替可能
- USB-Cデジタル出力で、スマホやパソコンと幅広く互換
- 独自のショックマウント構造と金属製ポップガードにより、雑音を効果的に低減
- Uni Pro(A)：耐荷重1.5kgのブームアーム仕様
- Uni Pro(D)：卓上ベース仕様（設置や組み合わせの自由度が高いモデル）

注意事項

⚠ 録音効果を最大化するために、マイクの正面を音源に向けてください。

⚠ 本製品を、ラジエーター、オーブン、冷蔵庫、エアコンなど、熱源や干渉源の近くで使用しないようにしてください。

⚠ 本製品は高精度の機器ですので、使用時の落下、沖突、沖撃はご遠慮ください。

⚠ 雨や湿気の多い場所でこの機器を使用しないでください。使用すると、ショートの危険があります。

⚠ 乾燥した場所で保管をお願いします。

⚠ コンピュータに接続して使用する際は、音声設定画面で「Comica_EJoy Uni Pro TX」を入力/出力デバイスに選択してください。コンピュータに接続して使用する際は、音声設定画面で「Comica_EJoy Uni Pro TX」を入力/出力デバイスに選択してください

マイクをコンピュータに接続して使用する際：

音声

出力

出力デバイスを選択する際

Comica_EJoy Uni Pro TX

入力

入力デバイスを選択する際

Comica_EJoy Uni Pro TX

受信器をコンピュータに接続して使用する際：

音声

出力

出力デバイスを選択する際

Comica_EJoy Uni Pro RX


入力

入力デバイスを選択する際

Comica_EJoy Uni Pro RX

⚠ コンピュータに接続して入力する際に音量が大きすぎる場合は、パソコンの「マイク属性-レベル」を調整してゲインを下げることができます。（以下はWindows システムを例として説明します）

マイクをコンピュータに接続して使用する際：

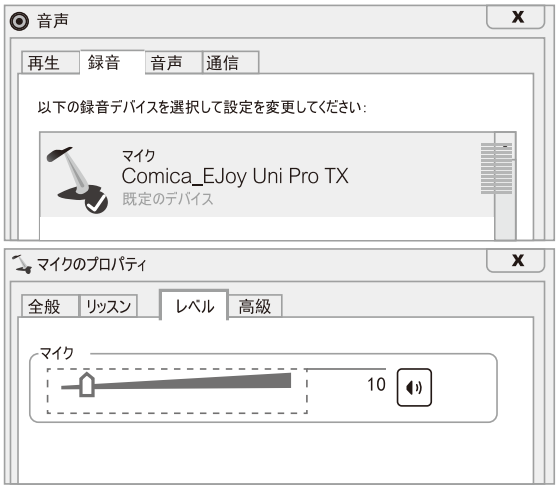

受信器をコンピュータに接続して使用する際：




⚠ EJoy Uni Proは、日本の電波法に定める技術基準（第38条の24第1項）に適合して、正式な型式認証を取得しています。


R 220-JP8047

内容物一覧

EJoy Uni Pro(A):




マイク（TX） *1




受信機（RX） *1




ポップガード *1



USB C-USB C充電/出力ケーブル *1



USB C-USB A アダプター *1



ブームアーム *1



フックリング *5




説明書 *1




保証書 *1


EJoy Uni Pro(D):




マイク（TX） *1




受信機（RX） *1




ポップガード *1



USB C-USB C充電/出力ケーブル *1



USB C-USB A アダプター *1



卓上スタンダ *1




説明書 *1



保証書 *1

パーツ紹介及び説明

マイク（TX）：

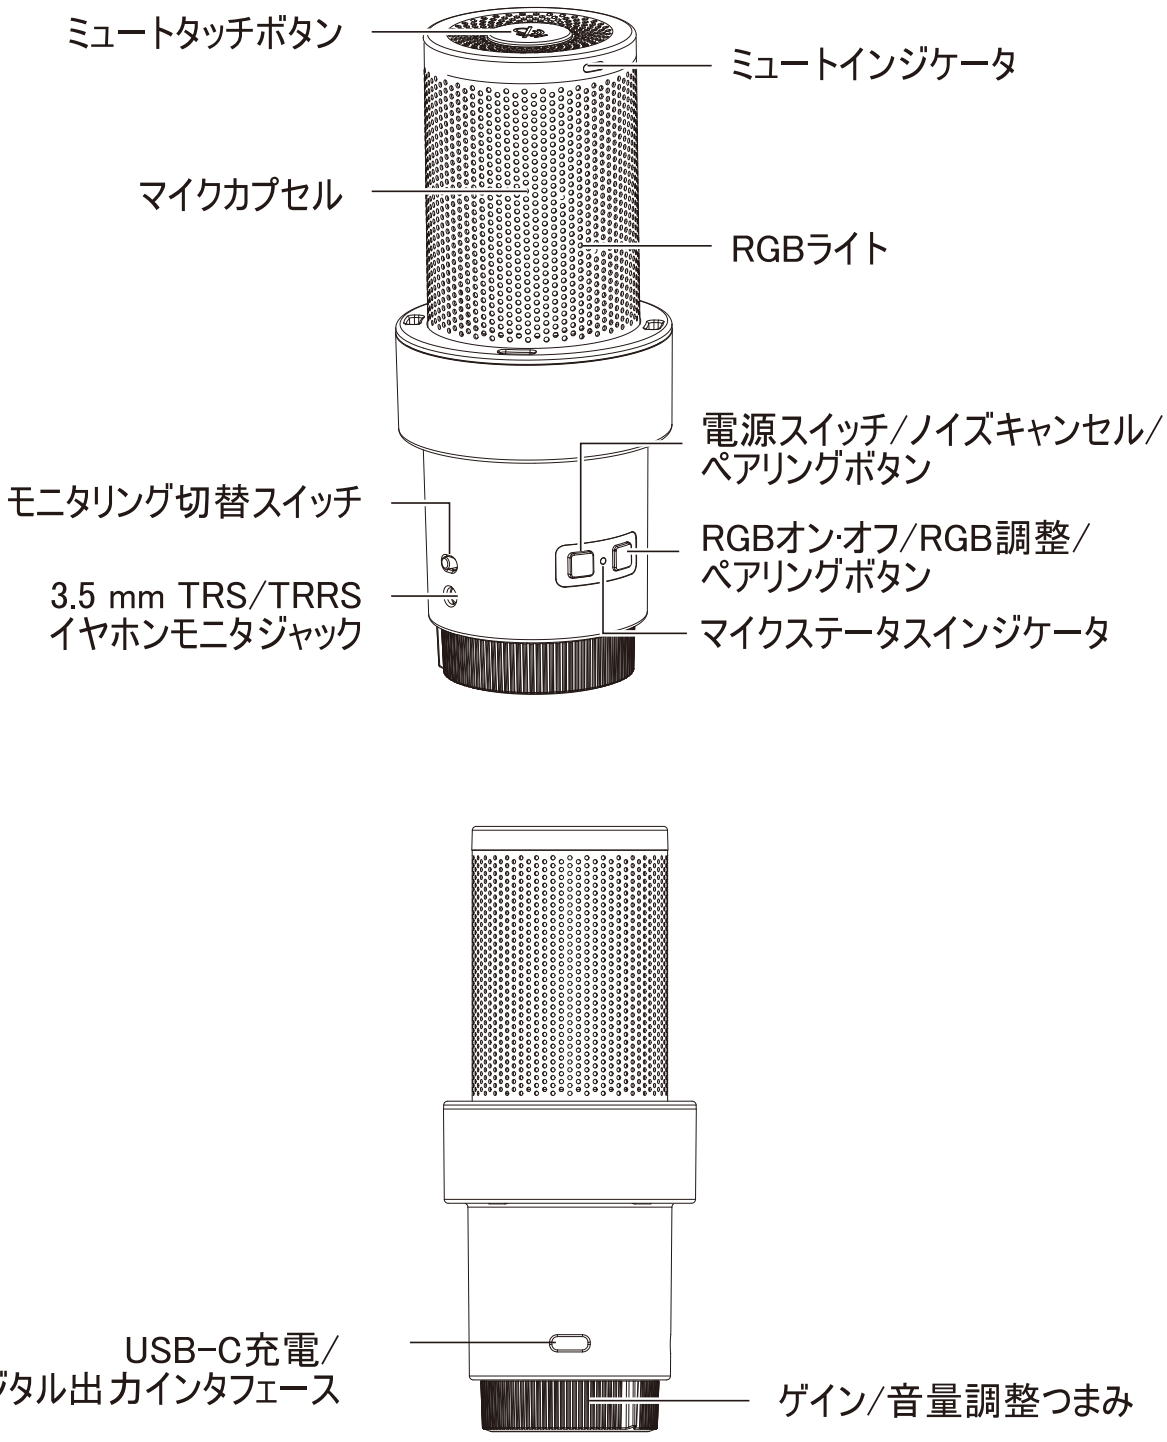

1. ミュートタッチボタン

軽くタッチしてマイクを通常収音とミュートを切り替えます。

2. マイクカプセル

3. モニタリング切替スイッチ

スイッチを後ろにスライドするとマイクのモニターがオンになり、前にスライドするとオフになります。

4. 3.5 mm TRS/TRRSイヤホンモニタジャック

3.5 mm TRS/TRRSイヤホンを挿してモニタリングする。

5. ミュートインジケータ

ミュートオン後は赤ランプが点灯し、ミュートオフ後はランプが消灯します。

6. RGBライト

7. 電源スイッチ/ノイズキャンセル/ペアリングボタン

長押しで電源をオン/オフにします。短く押してノイズキャンセリング機能をオン/オフにします。

8. RGBオン·オフ/RGB調整/ペアリングボタン

長押してRGBライトををオン/オフします;短く押して七色/ダイナミックグラデーション/ダイナミックオディオ/Comica オレンジの4つのライトモードを切り替えます。

☞ 上記2つのペアリングボタンを同時に長押しするとペアリング状態に入り、その際マイク状態インジケーターの青灯が高速点滅します。

9. マイクステータスインジケータ

未ペアリング	青灯低速点滅
ペアリング中	青灯高速点滅
ペアリング完了	青灯点灯
ノイズキャンセリング状態	緑灯点灯
バッテリー残量不足	赤灯点滅
充電中（電源オフ）	赤灯点灯
充電完了（電源オフ）	青灯点灯


10. USB-Cデジタル出力インジケータ

充電/出力ケーブルでモバイルバッテリー/DC電源に接続して充電、またはデバイスに接続してオーディオを出力できます。

11. ゲイン/音量調整つまみ

中央のオレンジ色の基準ラインを中心に、左へ回せばマイクゲインとモニター音量が下がり、右へ回せばゲインと音量が上がります。

受信機（RX）:

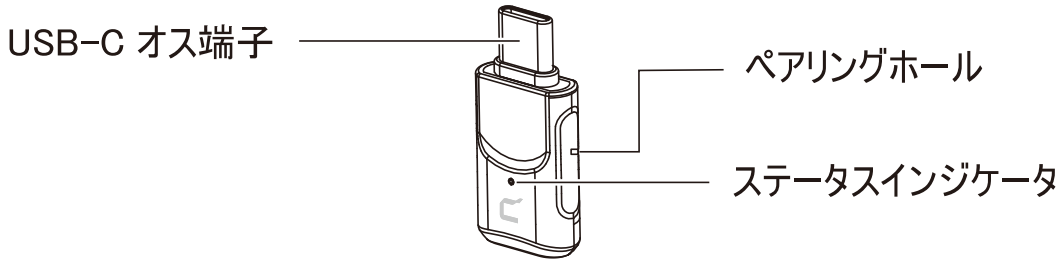


1. USB-C オス端子

2. ペアリングホール

3. ステータスインジケータ

未ペアリング	青灯点滅
ペアリング中	青灯高速点滅
ペアリング済み	青灯点灯

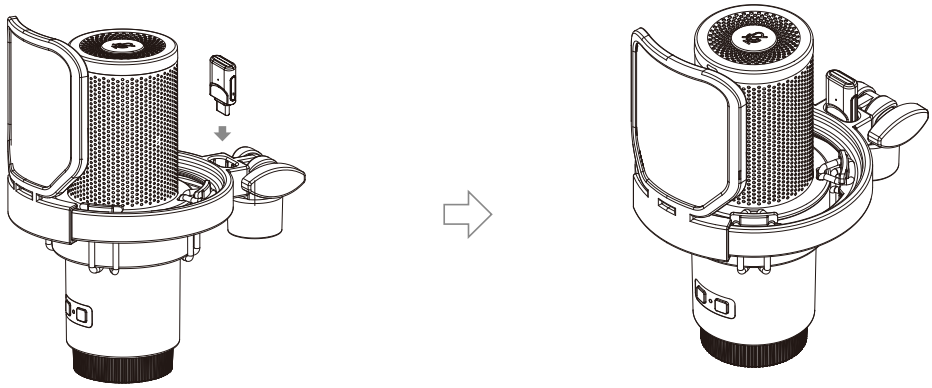


受信機をショックマウントのくぼみに収めます。


インストールと使用方法

ブームアームのインストール:


1. ブームアームの固定クリップをテーブルなどに挟み、時計回りに締めて固定します。

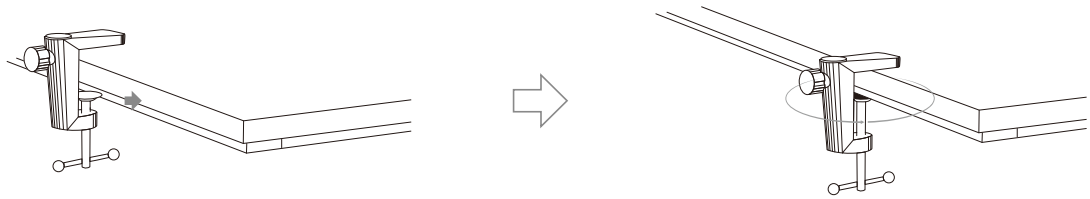


2. ブームアームを固定クリップに取り付け、固定ネジノブでアームの角度を調整します。

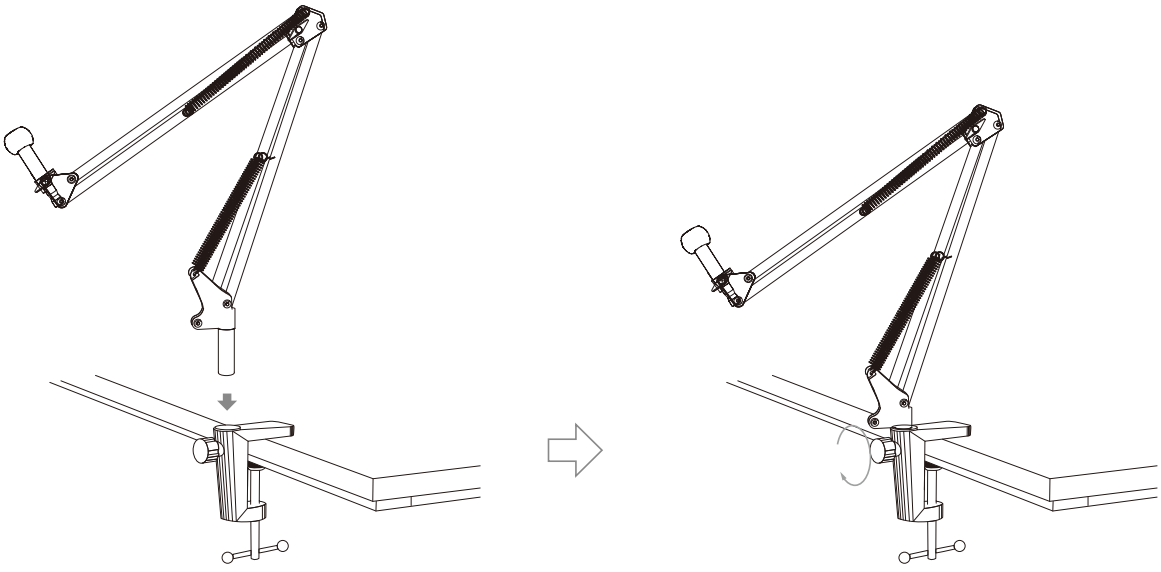

3. マイクショックマウントをブームアームに取り付け、時計回りに回して固定します。

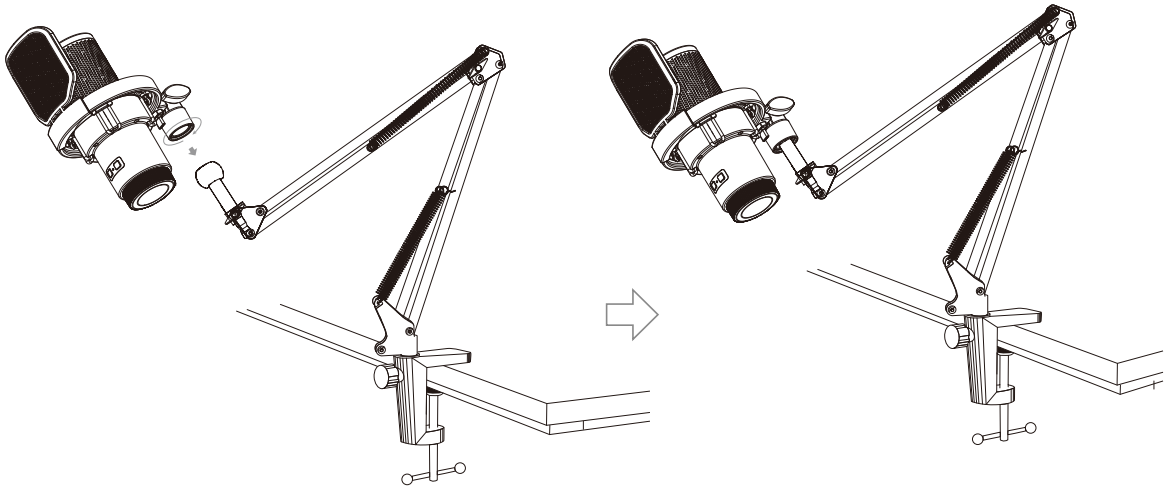


4. ブームアームの固定ネジでマイクの位置を調整し、固定します。

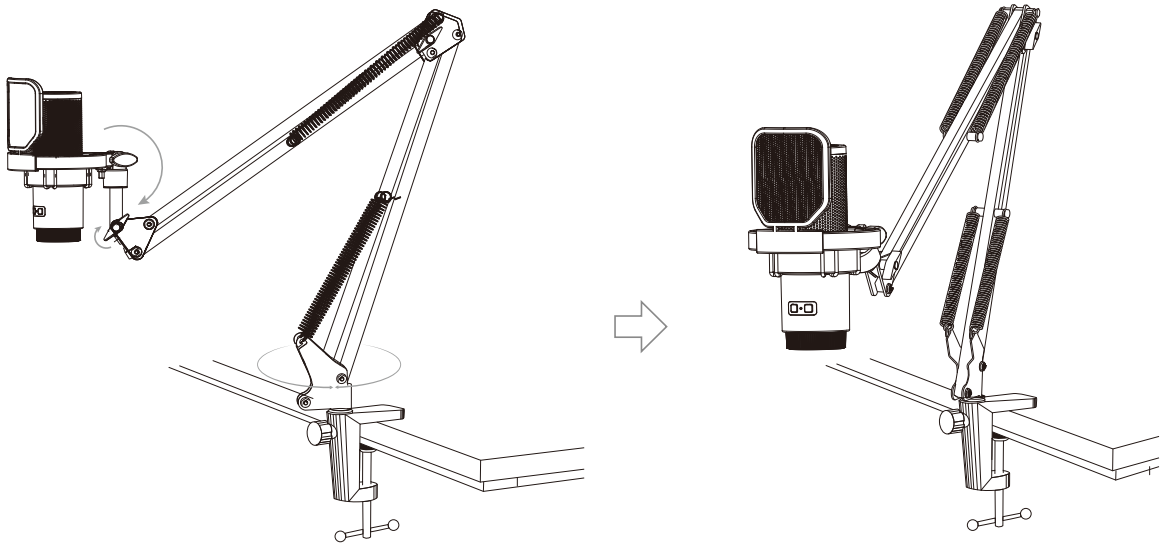


スタンドのインストール:


1. ブームアームのネジ穴をスタンドのネジに接続し、時計回りに回して固定します。

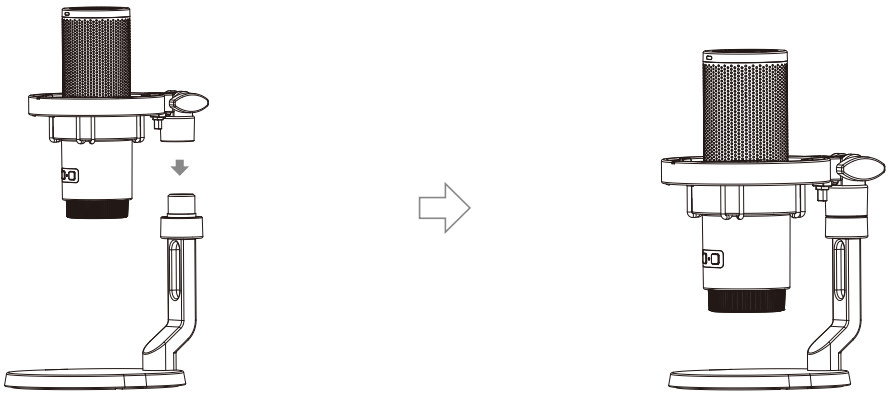


2. ポップガードをショックマウントに取り付けます。

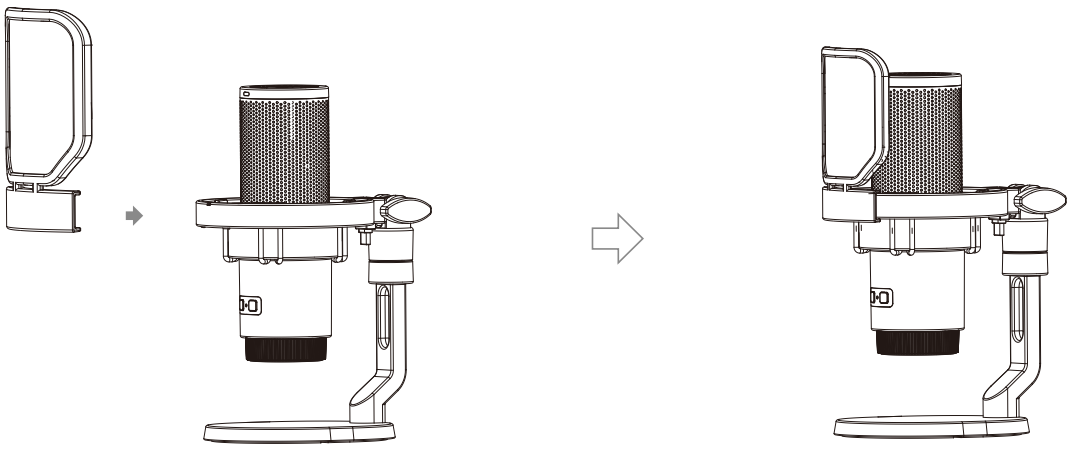

3. ショックマウントのネジで、ショックマウントとマイクの位置を調整し、固定します。

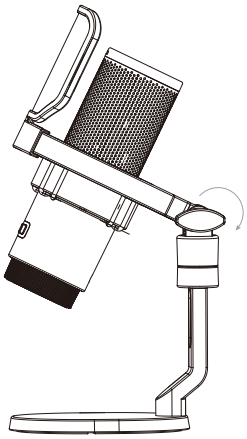

ケーブル接続モード

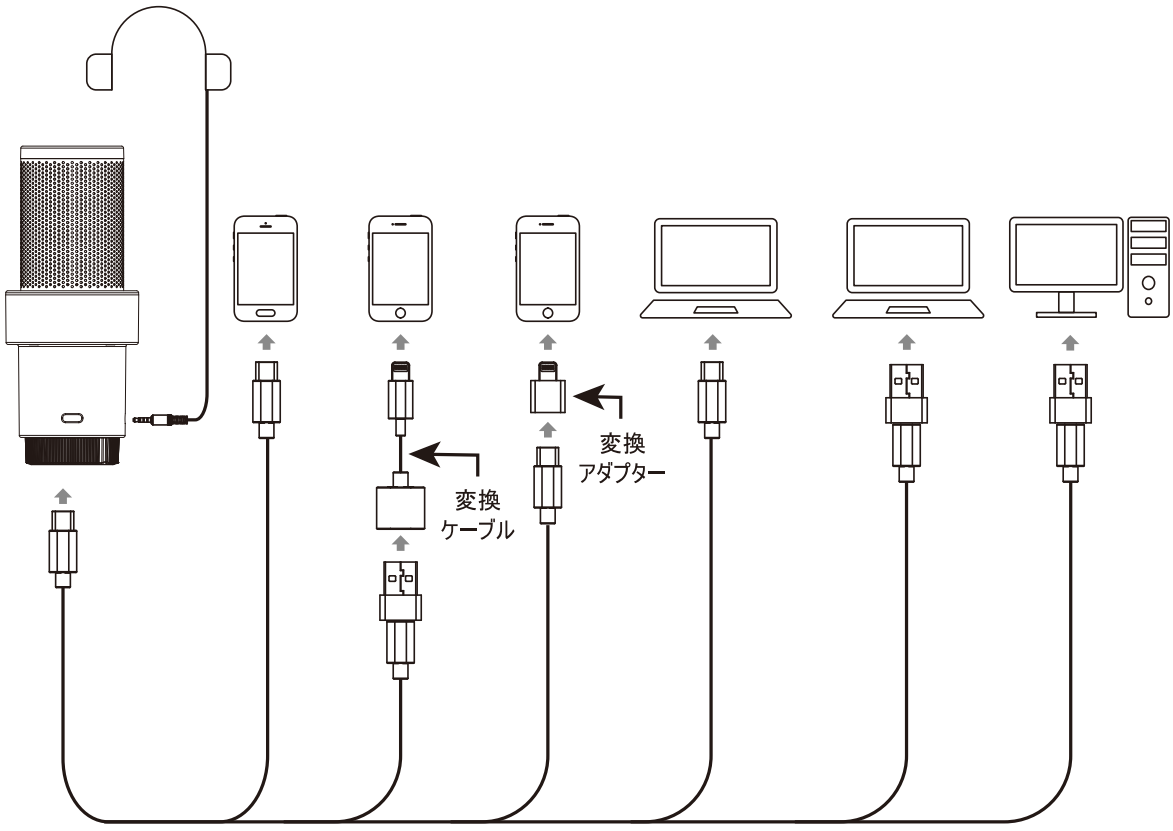


1. Lightning インターフェイスデバイスと接続する場合は、OTG機能のある USB-Lightning アダプタケーブル/アダプタをご購入ください。
2. マイクはデバイスに接続すると自動的にオンになり、デバイスから取り外して10分経つと自動的にオフになります。

ワイヤレスモード

ペアリング（出荷時にはマイクとレシーバーはデフォルトでペアリング完了です。）

受信機（RX）をデバイスに挿すと、RXとマイクが自動的に接続されます。その際、
RXのインジケーター青灯が点灯します。
青灯が低速点滅している場合は、接続されていません（未ペアリング）。

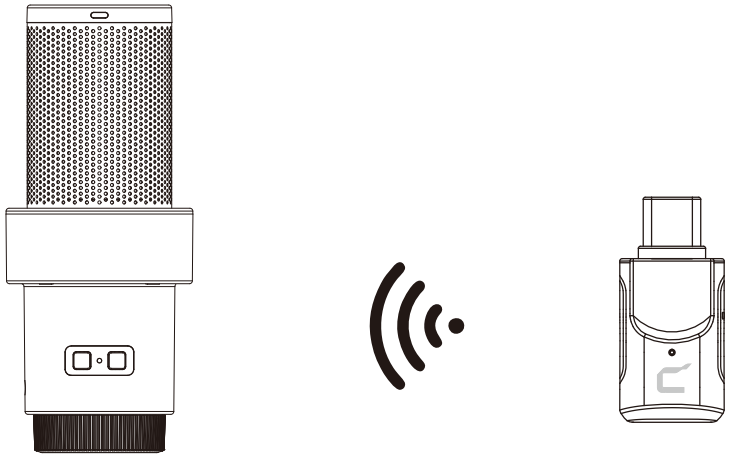


もし接続が切れた場合は、以下の手順で再ペアリングを行ってください：

1. マイクの電源を入れた後、2つのペアリングボタンを同時に長押しするとペアリング状態になり、その際ステータスインジケーターの青灯が高速点滅します。
2. RXをデバイスに接続し、ピン（SIMピンなど）をRXのペアリング穴に挿して押し込むとペアリング状態になり、その際ステータスインジケーターの青灯が高速点滅します。（*ピンは別途ご用意ください。）
3. ペアリングが成功すると、マイクとRXのステータスインジケーターが両方とも青灯点灯します。

使用

受信機でマイクを使う時、以下の接続方法をご参考ください：

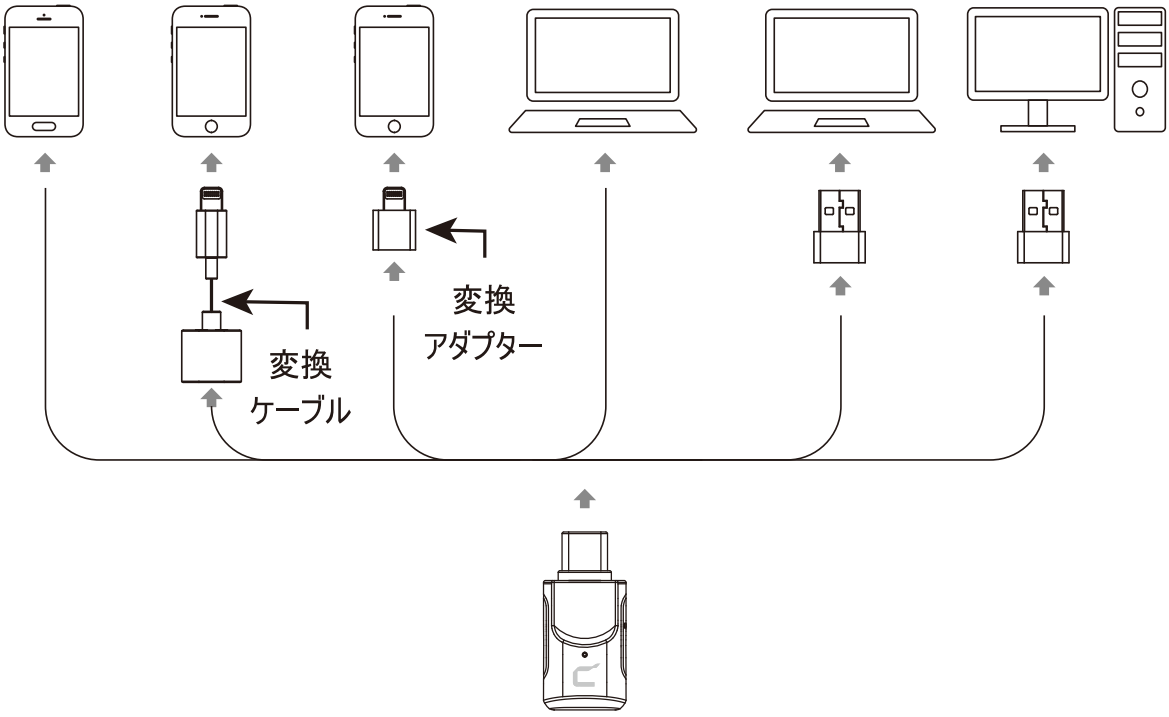

1. その他のインターフェース機器と組み合わせる場合は、関連OTG機能のある変換ケーブル/変換アダプターをご購入ください。
2. ケーブル接続モードとワイヤレスモードは同時に使用できます。

仕様

出力パワー	+10dBm
感度	−97dBm
ワイヤレスタイプ	セラミックアンテナ
ワイヤレス遅延	<20ms
指向性	単一指向性
ダイヤフラム感度	−35dB±2dB
周波数特性	20Hz ~ 20kHz
最大音圧レベル	105dB (@ 1% THD)
S/N	72dB SPL(A-weighted,as per IEC651)
ノイズ	22dB SPL(A-weighted,as per IEC651)
ダイナミック・レンジ	83dB SPL(A-weighted,as per IEC651)
サンプリングレート	48kHz
ビット深度	マイク録音：24-bit イヤホンモニター：16-bit
出力コネクター	USB-C
モニターコネクター	3.5mm TRS/TRRS
バッテリータイプ	リチウムポリマー 1000mAh 3.7V
充電時間	1.5 時間
使用時間	RGBオフ：36 時間 RGBオン：18 時間
質量	マイク本体：140g 受信機：2.2g
寸法	マイク本体：Φ64.5 x L154.2mm 受信機：15.8 x 7.0 x 32.2mm
作動温度	0℃~+50℃
保管温度	−20℃~+60℃

Instagram: Comica Audio
Facebook: Comica Audio
TikTok: Comica Audio
Twitter: Comica Audio JP
YouTube: Comica Audio
Website:comica-audio.com

COMICA is a registered trademark owned by Commlite Tech Co.,Ltd
Email: support@comica-audio.com